


AMT Combination Strapping Tool

for use with Tenax® Polyester Strapping

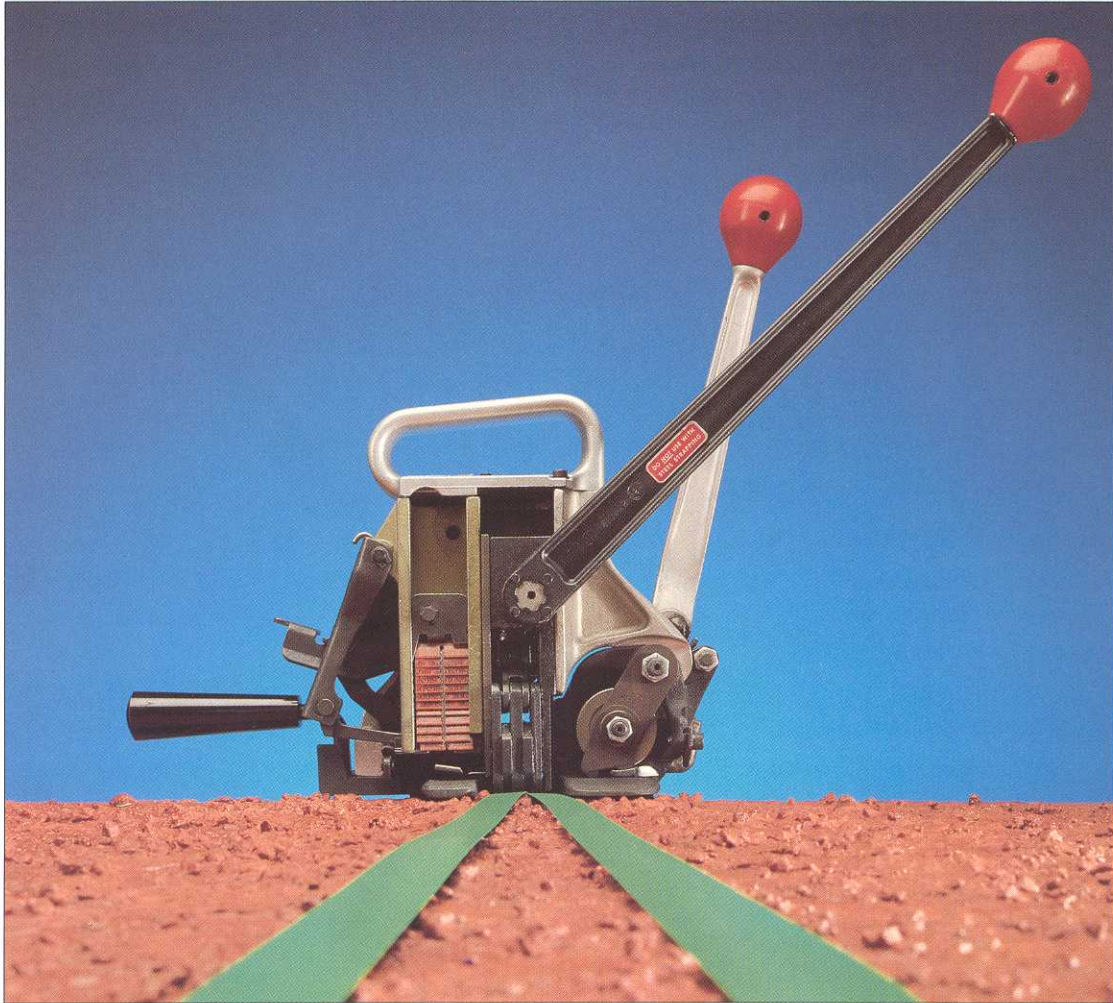

Features and Benefits

A manual seal-feed combination tool designed specifically for use with 16mm heavy duty polyester strap.

No power source required. The performance potential of heavy duty Tenax strapping can now be applied anywhere!

Easy to operate – ergonomically designed for efficient tension and sealing.

Rocking gripper – no strap wastage.

Adjustable strap tension – optional torque tension handle, provides fast, efficient tensioning.

Steel and aluminium alloy construction – Based on proven technology for maximum durability & reliability.



AMT Combination Strapping Tool

for use with Tenax® Polyester Strapping

Design, function and operation

The AMT tool is designed to make full use of the performance potential now available in polyester strapping. With AMT, this remarkable strap can be applied anywhere, both outdoors and indoors, without the need for a power source.

Ergonomically designed, AMT can be easily carried to different work stations, providing maximum operational flexibility. Simple and efficient to operate, AMT features a quick cartridge loading facility for its specially designed seals – each seal has sharp grippers in-built to guarantee maximum joint strength, with no slippage.

An important new AMT feature is its rocking gripper which

ensures that all strap tails remain the same length, eliminating wastage. For applications requiring precisely controlled tension levels, an optional torque tension handle is available.

Heavy duty polyester strapping offers considerable benefits in use and is suitable for an extensive range of applications including, lumber, brick, panels, fibre baling, metal and paper products. Polyester is easy to use and does not stain the product or damage the product surface. With AMT, Signode have answered the need for a reliable, high quality, manual combination tool for use with this new heavy duty strap.

High Tension Capability

AMT provides the tensioning capabilities required to elongate heavy duty polyester strap. It allows the use of a combination tool when electric or pneumatic power sources are not available.

Adjustable Strap Tension

An optional torque-tension handle is available allowing the operator to apply a consistent tension.

Reliable & Durable

Based on a design that has been extensively proven, AMT is reliable and durable and is suitable for the most demanding applications.

Easy to operate


Simple and easy to use. AMT features the same loading, tensioning and sealing sequence as the well established AM tool.

Rocking Gripper

Eliminates strap wastage by ensuring all strap tails remain the same length.

Easy to Repair & Service

Repair and servicing is simple and fast, reducing tool downtime.

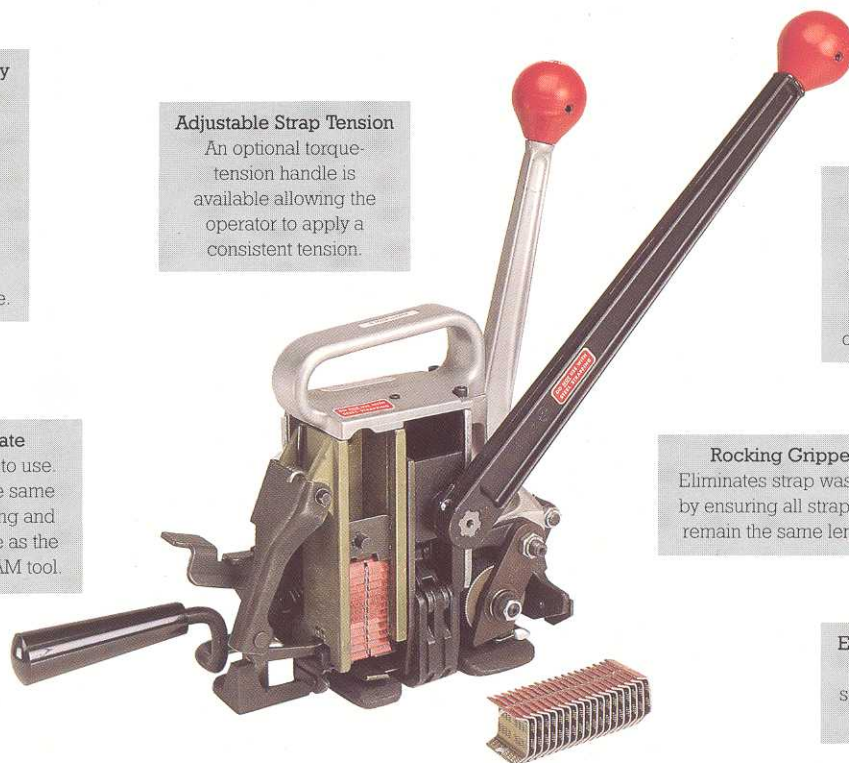

Dimensions and Performance

Weight	6.8kg
Base Length	128mm
Overall Length	610mm (with handles in home position)
Width	152mm (including handles)
Height	216mm
Maximum Applied Tension	2500N
Min. Sealing Effort	130N

Strapping

AMT is designed for use with Signode's new range of 16mm heavy duty Tenax polyester strapping, which provides remarkable strength and durability. For further information on Tenax Strap, please contact the sales office.

CE

SEP 1982/94 Printed in England

SIGNODE®

©Signode, a division of ITW Limited, 1994

Signode has a policy of continuous product development and reserves the right to alter specifications at anytime without prior notice.

Designed and Produced by SEL Stanton/Ellsom Ltd. Birmingham.