

EASY ECOMAT



TW Mima

Packaging Systems

ECOMAT EASY

The new generation of Ecomat wrapping machines offers reliability, simplicity and safety as well as reduces your packaging costs.



Efficiency

- Adjustable mechanical brake
- Variable stretch ratio
- All types of film can be used

Safety

- Film carriage inside the tower
- Safe, fast and easy loading of film
- Control for door opening
- Emergency stop




Simplicity

- Fast and simple installation
- Safe transportation (machine packed in a wooden crate)
- Easy maintenance
- Height censoring by photocell



Easy to use


- Adjustable number of top and bottom wraps
- Adjustable carriage and turntable speed
- Soft START/STOP
- Indexed stop
- 3 wrapping programs: single, cross and splash proof (with top sheet)

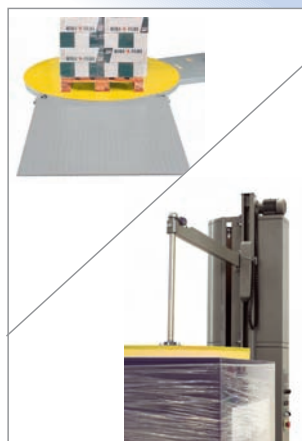

Options

- Access ramp
- Pit foundation template
- Load stabilizer
- Turntable diameter 2000 mm

- FS model

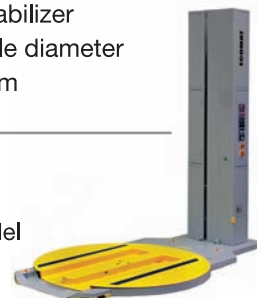

Technical data

Capacity:	15 – 25 pallets/h (depending on packaging unit)
Power supply:	220-240 V/ 50 Hz
Turntable speed:	2 – 12 rpm, selectable
Film carriage:	variable climbing speed
Machine dimensions:	2575 x 1650 mm
Turntable Ø:	1650 mm
Space required:	4,3 m ² (height 2900 mm)
Machine weight:	approx. 430 kg
Wrapping height:	2400 mm
Max. pallet weight:	2000 kg (1200 kg for FS option model)
Pallet dimensions:	L =1200 mm, W= 1200 mm, H= 2400 mm

